


STANDARD CONSTRUCTION	
<b>BLADE STYLE:</b>	4" (102 mm) DEEP STORMPROOF BLADES
<b>CORNER STYLE:</b>	MITRE CORNER
<b>MATERIAL:</b>	EXTRUDED ALUMINUM – 6063-T6 ALLOY
<b>FRAME THICKNESS:</b>	0.081" (2.06 mm)
<b>BLADE THICKNESS:</b>	0.081" (2.06 mm)
<b>BLADE ANGLE:</b>	45°
<b>BLADE CENTRES:</b>	4.875" (124 mm)
<b>BIRDSCREEN:</b>	19 GA. GALVANIZED BIRDSCREEN - 1/2" x 1/2" OPENINGS
<b>FINISH:</b>	MILL
<b>ROOF INSULATION:</b>	FACTORY APPLIED ANTI-CONDENSATE COATING

SIZE LIMITATIONS		
	MINIMUM	MAXIMUM
<b>THROAT</b> T <sub>L</sub> x T <sub>W</sub>	32" x 32" (812.8 x 812.8 mm)	CONSULT VENTEX
<b>CURB CAP ID</b> C <sub>L</sub> x C <sub>W</sub>	40" x 40" (1016 x 1016 mm)	
<b>PENTHOUSE OD</b> P <sub>L</sub> x P <sub>W</sub>	40.125" x 40.125" (1019.2 x 1019.2 mm)	
<b>HEIGHT</b>	12" (305 mm)	

\*PENTHOUSE WILL BE MANUFACTURED EXACT SIZE UNLESS OTHERWISE SPECIFIED  
 \*RECOMMENDED CURB OD SIZE = CURB CAP ID – 1 1/2" (38 mm)  
 \*PENTHOUSES OVER 60" x 90" (W x H) MAY BE SHIPPED KNOCKED DOWN  
 \*PENTHOUSES OVER 96" x 96" (W x D) MAY BE SUPPLIED WITH SUPPORT CHANNELS BENEATH THE ROOF

AVAILABLE ACCESSORIES	
<b>FINISH:</b>	<b>SCREENS:</b>
<ul style="list-style-type: none"> <li>• POWDER COAT FINISH</li> <li>• DURANAR FINISH</li> <li>• ANODIZED FINISH               <ul style="list-style-type: none"> <li>○ CLEAR ANODIZED</li> <li>○ LIGHT BRONZE</li> <li>○ MEDIUM BRONZE</li> <li>○ DARK BRONZE</li> <li>○ BLACK ANODIZED</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• BIRDSCREEN               <ul style="list-style-type: none"> <li>○ 1/2" x 1/2" INTER CRIMPED ALUMINUM</li> <li>○ 1" x 1" INTER CRIMPED ALUMINUM</li> <li>○ ALUMINUM BIRDSCREEN WITH FRAME</li> </ul> </li> <li>• INSECT SCREEN (ALUMINUM AND SS)               <ul style="list-style-type: none"> <li>○ 18 x 14 MESH WITH FRAME</li> </ul> </li> </ul>
<b>OTHER:</b>	<b>BLANK-OFF PANELS (ALUMINUM):</b> VARIOUS GAUGES
<ul style="list-style-type: none"> <li>• EXTENDED SILLS</li> <li>• FILTER RACKS</li> <li>• STAINLESS STEEL FASTENERS</li> <li>• HINGED ROOF</li> <li>• HINGED ACCESS DOORS</li> <li>• 3MM CONSTRUCTION</li> <li>• CONTROL DAMPERS FOR THROAT</li> </ul>	<ul style="list-style-type: none"> <li>• NON-INSULATED BLANK-OFF PANELS</li> <li>• INSULATED BLANK-OFF PANELS               <ul style="list-style-type: none"> <li>○ 1" (25.4 mm) INSULATION</li> <li>○ 2" (50.8 mm) INSULATION</li> </ul> </li> </ul>

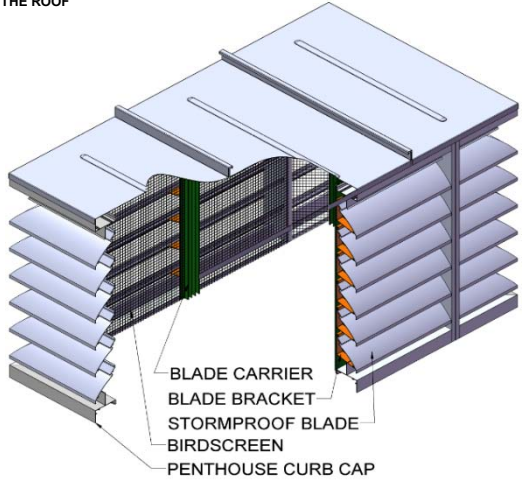

TAG	QTY.	THROAT SIZE T <sub>L</sub> x T <sub>W</sub>	CURB CAP ID C <sub>L</sub> x C <sub>W</sub>	PENTHOUSE OD P <sub>L</sub> x P <sub>W</sub>	HEIGHT	ACCESSORIES
		x	x	x		
		x	x	x		
		x	x	x		
		x	x	x		
		x	x	x		

THROAT SIZE + 8" (203 mm)      THROAT SIZE + 8.125" (206 mm)

<b>PROJECT NAME:</b> _____	<b>ENGINEER:</b> _____
<b>CONTRACTOR:</b> _____	<b>SUBMITTAL DATE:</b> _____