


**OPTION PRR • PULL RING RELEASE FOR
HORIZONTAL MOUNT CURTAIN TYPE FIRE
DAMPERS • FOR TYPE A AND B DAMPERS**



APPLICATION:

Horizontal mount curtain type fire dampers must be installed with the locking ramps on the upper side. Access doors should be installed above the damper so that, to reopen a closed damper, the lead “locked” blade can be pushed down off of the locking ramps in order to release the blades. In circumstances where access to the damper is only possible from below, the Pull Ring Release (PRR) option allows for the lead blade to be easily released from the locking ramps from below the damper. Available on all type A and B horizontal mount curtain type fire dampers.

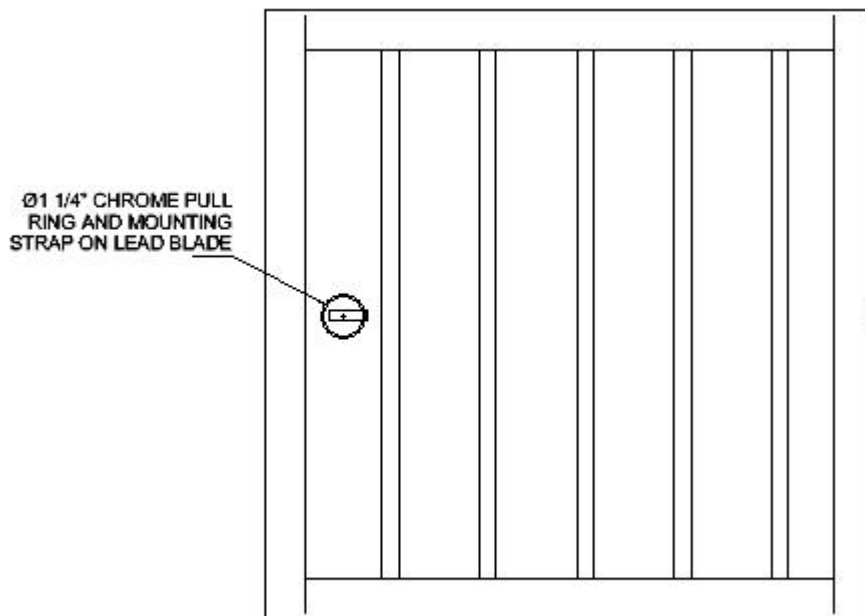

Ø1 1/4" CHROME PULL RING AND MOUNTING STRAP ON LEAD BLADE

FACE VIEW OF CLOSED DAMPER