



Models: 2210S(SS) / 2215S(SS) 2" Formed Steel Stationary Louver



Channel Frame
2210S(SS)

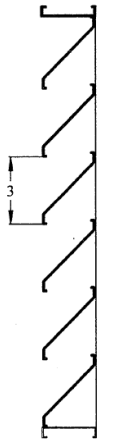

Flange Frame
2215S(SS)

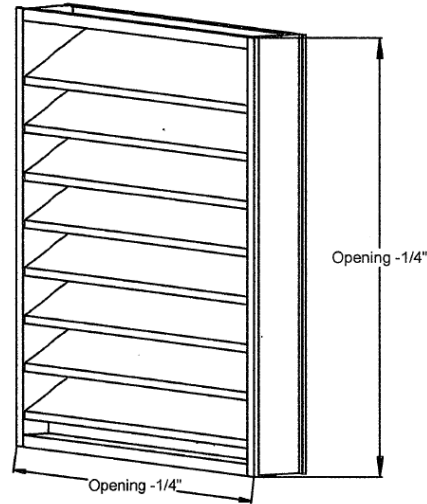

Quantity	Ref. #	Width (W) Opening Size*	Height (H) Opening Size*	Frame	Options/Accessories
PROJECT NAME:				ENGINEER:	
CONTRACTOR:				SUBMITTAL DATE:	

*Louver will be manufactured 1/4" smaller than given opening dimensions unless otherwise specified.

STANDARD CONSTRUCTION:

- Depth: 2" (51 mm).
- Frame: 18 ga. galvanized steel.
- Blade: 18 ga. galvanized steel.
- Blade Angle: 45 degrees.
- Blade Centers: 3" (76 mm).
- Finish: Mill.
- Bird Screen: 1/2" x 1/2" x 19 ga. galvanized.
- Minimum Size: 8"w x 8"h (203 x 203 mm).
- Maximum Panel Width: 60" (1524 mm).
- Maximum Panel Height: 72" (1829 mm).
- Standard Finish: Mill finish.
- Free Area 48" x 48" Unit: 7.38 sq. ft. (0.69 m²).

OPTIONS/ACCESSORIES:

- Stainless Steel Construction:** Type 304
 Type 316
- Blades:** 2" Blade Centers/30 Degrees
- Bird Screen:** 1" x 1" Galvanized
 1/2" x 1/2" Stainless Steel
- Insect Screen:** 18 x 14 Mesh
- Finish:** Powder Coat Paint: Colour # _____
- Accessories:** Blank-Off Panel
 1" or 2" Insulated Blank-Off Panel
 Hinged Frame
 Hinged Frame and Louvered Door
 Security Bars
 Extended Sills
 Sleeves
 Filter Racks
 Extended Sill